





# Low PIM Assemblies




SMA-Male to SMA-Male					
Series	Freq (GHz)	Connector	PIM (dBc) Typ	Cable Type	L"
LPCSM-SM-36-M09	Hz - 6.0	SMA-M to SMA-M	<-155	SRX141	36
LPCSM-SM-72-M09	Hz - 6.0	SMA-M to SMA-M	<-155	SRX141	72
N-Male to N-Male					
Series	Freq (GHz)	Connector	PIM (dBc) Typ	Cable Type	L"
LPCNM-NM-36-M09	Hz - 6.0	N-M to N-M	<-155	SRX141	36
LPCNM-NM-72-M09	Hz - 6.0	N-M to N-M	<-155	SRX141	72
SMA-Male to N-Male					
Series	Freq (GHz)	Connector	PIM (dBc) Typ	Cable Type	L"
LPCSM-NM-36-M09	Hz - 6.0	SMA-M to N-M	<-155	SRX141	36
LPCSM-NM-72-M09	Hz - 6.0	SMA-M to N-M	<-155	SRX141	72
4.1/9.5 Mini DIN Male to 4.1/9.5 Mini DIN Male					
Series	Freq (GHz)	Connector	PIM (dBc) Typ	Cable Type	L"
LPMDM-MDM-36-M09	Hz - 6.0	4.1/9.5-M to 4.1/9.5-M	<-155	T402/SRX141	36
LPMDM-MDM-72-M09	Hz - 6.0	4.1/9.5-M to 4.1/9.5-M	<-155	T402/SRX141	72



LPCSM-SM-X-M09

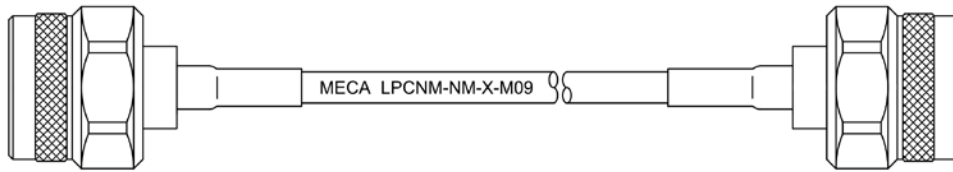

LPCNM-NM-X-M09

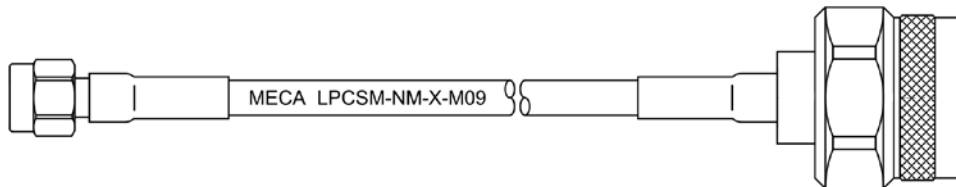

LPCSM-NM-X-M09

Vertrieb und Produktinformation:

Melatronik Nachrichtentechnik GmbH

vertrieb@melatronik.de www.melatronik.de