





# Low PIM Attenuators




Series	Max Power (W)	Freq (GHz)	Connector	PIM (dBc) Typ	L" x D" x W"
LPA50-dB-1WWP	50	0.698 - 2.700	N-M to N-F	<-160	11.94 x 4.35 x 6.4
LPA50-dB-11WWP	50	0.698 - 2.700	7/16 DIN M to 7/16 DIN-F	<-160	12.31 x 4.35 x 6.4
LPA50-dB-14WWP	50	0.698 - 2.700	4.1/9.5 M to 4.1/9.5 F	<-160	11.73 x 4.35 x 6.4
LPA100-dB-1WWP	100	0.698 - 2.700	N-M to N-F	<-160	12.84 x 4.75 x 11.0
LPA100-dB-11WWP	100	0.698 - 2.700	7/16 DIN M to 7/16 DIN-F	<-160	13.21 x 4.75 x 11.0
LPA100-dB-14WWP	100	0.698 - 2.700	4.1/9.5 M to 4.1/9.5 F	<-160	12.63 x 4.75 x 11.0

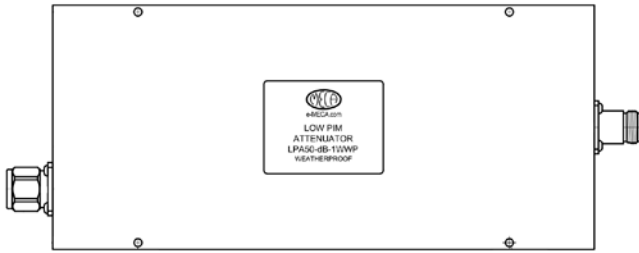


LPA50-dB-1WWP

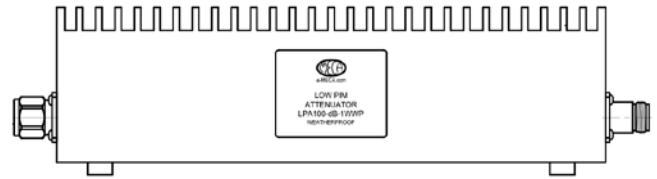


LPA100-dB-1WWP

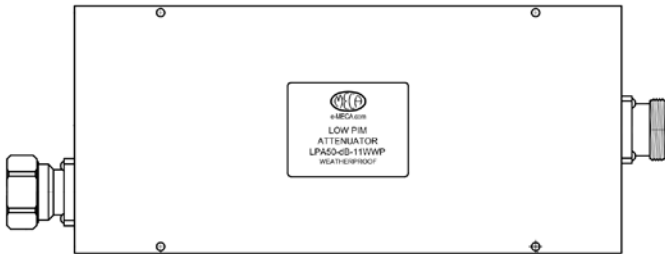


LPA50-dB-11WWP

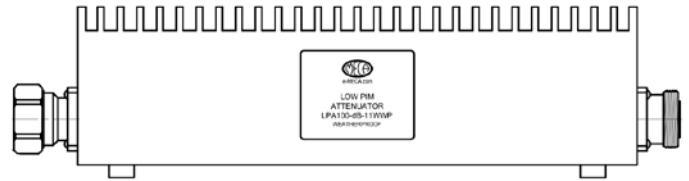

LPA100-dB-11WWP

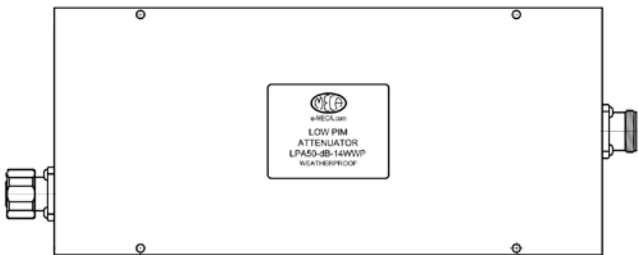

LPA50-dB-14WWP

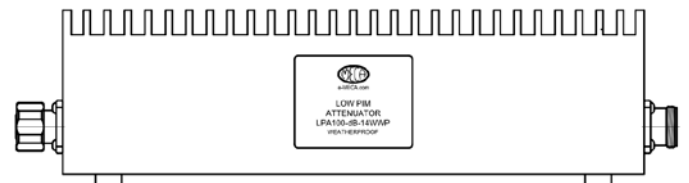

LPA100-dB-14WWP

Vertrieb und Produktinformation:

Melatronik Nachrichtentechnik GmbH

vertrieb@melatronik.de www.melatronik.de