





# Terminations 35 - 500 Watts




| Max Power (Watts) | Series         | Connector             | Freq (GHz) | L" x OD" (Nom)     |
|-------------------|----------------|-----------------------|------------|--------------------|
| 35                | 404-X          | N, SMA, 7/16 DIN, M/F | Hz - 6.0   | 2.77 x 1.62        |
| 50                | 480-X          | N, SMA, 7/16 DIN, M/F | Hz - 6.0   | 4.67 x 1.62        |
| 50                | 480-M02        | N-M                   | Hz - 6.0   | 4.67 x 1.30        |
| 75                | 485-1 / -2     | N-M / F               | Hz - 4.0   | 6.79 x 2.00        |
| 75                | 485-11 / -12   | 7/16 DIN-M / F        | Hz - 4.0   | 6.00 x 2.00        |
| 100               | 490-1 / -2     | N-M / F               | Hz - 4.0   | 6.00 x 2.73        |
| 100               | 490-11 / -12   | 7/16 DIN-M / F        | Hz - 4.0   | 6.00 x 2.73        |
| 250               | CTN-250-1 / -2 | N-M / F               | Hz - 3.0   | 2.25 x 2.30 x 1.06 |
| 500               | CTN-500-1 / -2 | N-M / F               | Hz - 2.0   | 2.25 x 2.30 x 1.06 |

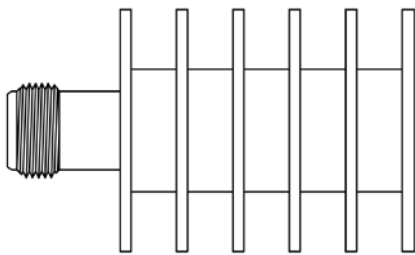


404-2

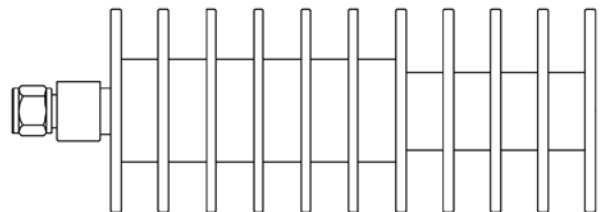


480-7

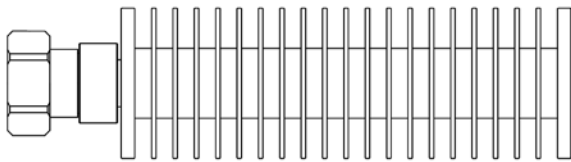


485-11

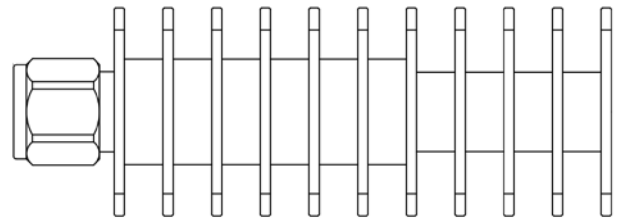

480-M02

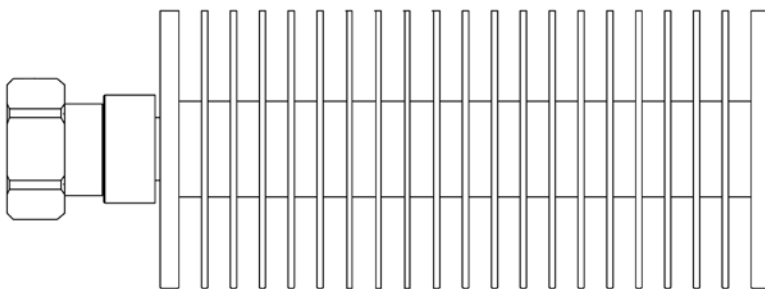

490-11

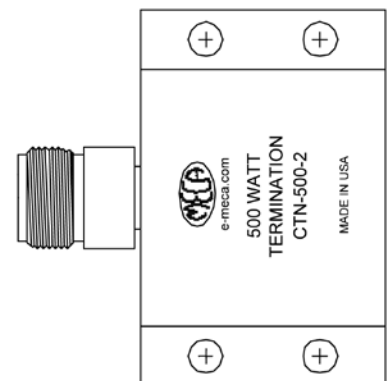

CTN500-2

Vertrieb und Produktinformation:

Melatronik Nachrichtentechnik GmbH  
vertrieb@melatronik.de www.melatronik.de